
LIBERTY
SPECIALTY METALS

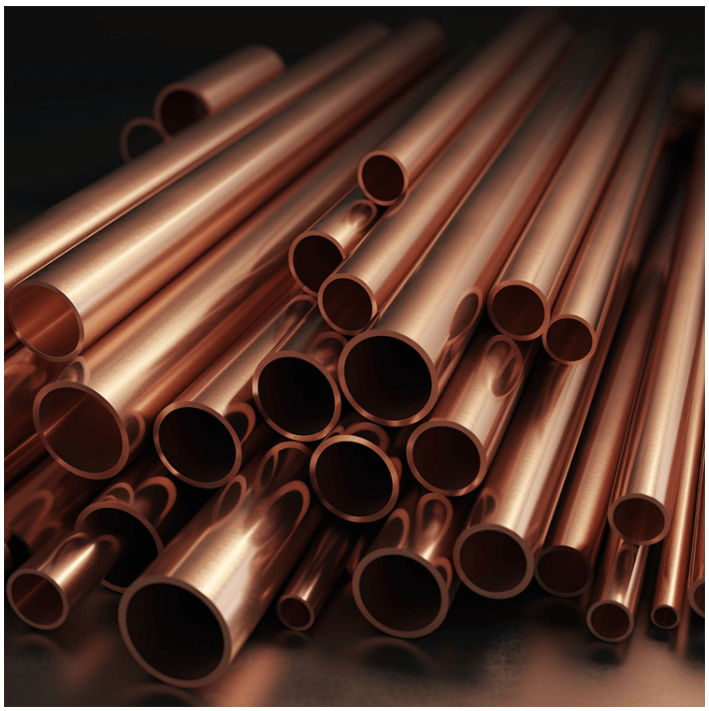

COPPER TUBING

Copper tubing is most often used for heating systems and as a refrigerant line in HVAC systems. Since copper is durable and corrosion resistant it can also withstand high temperatures — this is why it was so popular for the transportation of hot and cold water. Copper is recyclable, meaning you can reduce your environmental impact by using it.

SKU: N/A
Categories: Copper, Tubing & Pipes

PRODUCT DESCRIPTION

Alloys:

C120 – Deoxidized Low Phosphorus (DLP) Copper

C122 – Deoxidized High Phosphorus (DHP) Copper

Specifications:

ASTM B42 / ASME SB42

ASTM B75 / ASME SB75

ASTM B88 / ASME SB88

ASTM B111 / ASME SB111

ASTM B280 / ASME SB280

OD Range: 0.250" -> 4.00"

Wall Thickness: 0.020" -> 0.083"

Length: Per Request

Tempers:

061 (Annealed)

H80 (Hard Drawn)

H55 (Light Drawn)

Types: Available in coil or straight lengths

Industries:

Automotive

Electrical components

Machining

Refrigeration

Plumbing

Heat exchanger

LIBERTY
SPECIALTY METALS

ADDITIONAL INFORMATION

OD Range	0.250" -> 4.00"
Wall Thickness	0.020" -> 0.083"
Length	Per Request
Tempers	061 (Annealed), H80 (Hard Drawn), H55 (Light Drawn)
Types	Available in coil or straight lengths
Industries	Automotive, Electrical components, Machining, Refrigeration, Plumbing, Heat exchanger